ZS2020-2820 www.beckhoff.com/ZS2020-2820



## ZS2020-2820 | Socket field assembly, Power, IP67

7/8"-16 UN, socket, straight, female, 5-pin, A-coded




| Electrical data            |   |
|----------------------------|---|
| Rated voltage              | 250 V (according to IEC 60664-1)                                  |
| Rated current              | 16 A at 40 $^{\circ}$ C (according to IEC 60512-3), 9 A (CSA22.2) |
| Rated impulse voltage      | 2.7 kV  |
| Shielding                  | no  |
| Insulation resistance      | ≥ 100 M $\Omega$ (according to IEC 60512)                         |
| Mechanical data            |   |
| Installation size          | 7/8"-16 UN  |
| Connector type             | socket  |
| Configuration              | straight  |
| Contact type               | female  |
| Number of positions (face) | 5-pin   |
| Coding                     | A-coded   |
| Wire termination           | screw connection  |
| Mating cycles              | ≥ 100 (according to IEC 60512-9a)                                 |
| Way of locking             | screw   |
| Body color                 | black   |

ZS2020-2820 www.beckhoff.com/ZS2020-2820

| Body material                   | PA6 GF, UL 94   |
|---------------------------------|---|
| Coupling nut material           | CuZn, Ni  |
| Seal                            | elastomers  |
| Contact carrier color           | black   |
| Contact carrier material        | PA 6 GF, UL 94 V-0                                    |
| Contact plating                 | Ni, Au gal.   |
| Contact material                | CuZn  |
| Max. wire cross-section         | AWG16 (1.5 mm²)                                       |
| Max. cable outer diameter       | 6.0 - 12.0 mm   |
| Environmental data              |   |
| RoHS compliant                  | yes   |
| Ambient temperature (operation) | -40+85 °C, -40+185 °F                                 |
| Protection rating               | IP65/67 in screwed condition (according to IEC 60529) |
| Pollution level                 | 3/2 (according to IEC 60664-1)                        |

## Dimensions



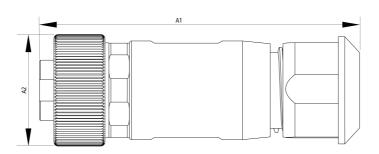

| A1 | 75.00 mm |
|----|----------|
| A2 | 26.00 mm |

## **Notes**

- Illustrations similar

| Ordering information |   |
|----------------------|---|
| ZS2020-2820          | 7/8", socket, plastic, screw type, straight, female, 5-pin, 0.51.5 mm², Ø612 mm |



Products marked with a crossed-out wheeled bin shall not be discarded with the normal waste stream. The device is considered as waste electrical and electronic equipment. The national regulations for the disposal of waste electrical and electronic equipment must be observed.

ZS2020-2820 www.beckhoff.com/ZS2020-2820

Beckhoff®, TwinCAT®, TwinCAT/BSD®, TC/BSD®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, Safety over EtherCAT®, TwinSAFE®, XFC®, XTS® and XPlanar® are registered trademarks of and licensed by Beckhoff Automation GmbH. Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.

© Beckhoff Automation GmbH & Co. KG 07/2023

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual application do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressively agreed in the terms of contract.

