


ZS2000-2620 | M12 socket field assembly, sensor, IP 65/67

M12, socket, straight, female, 4-pin, A-coded

Electrical data	
Rated voltage	250 V (according to IEC 61076-2-101)
Rated current	7,5 A at 40 °C (according to IEC 61076-2-101)
Rated impulse voltage	1.5 kV
Shielding	no
Contact resistance	$<$ 10 m Ω
Insulation resistance	≥ 100 M Ω (according to IEC 60512)
Mechanical data	
Accessories Type	Connector
Installation size	M12
Connector type	socket
Configuration	straight
Contact type	female
Number of positions (face)	4-pin
Coding	A-coded
Wire termination	screw connection
Recommended torque, nut	0.6 Nm
Recommended torque, screw termination	0.3 Nm
Mating cycles	≥ 100 (according to IEC 60512-9a)
Way of locking	screw
Weight per piece	0.023 kg (0.0507 lb)
Body colour	black
Body material	PA6 GF, UL 94 HB
Coupling nut material	GD-Zn, Ni
Seal	elastomers
0-ring	FPM/NBR
Contact carrier colour	black
Contact carrier material	PA 6, UL 94 V0
Contact material	CuZn, Ni b/Au 0.2 gal.
Max. wire cross section	AWG16 (1.5 mm²)
Max. cable outer diameter	4 - 8 mm
Environmental data	

Special features	halogen-free, flame-resistant as per IEC 60332-1-2, oil-resistant as per DIN EN 60811-2-1
RoHS compliant	yes
Ambient temperature (operation)	-30+85 °C, -22+185 °F
Protection class	IP 65/67 in screwed condition (according to IEC 60529)
Pollution level	3/2 (according to IEC 60664-1)

Dimensions

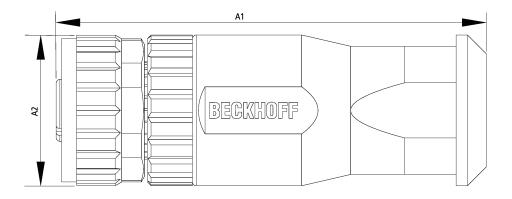



A1	57.00 mm
A2	Ø 20.00 mm

Notes

- Illustrations similar

Ordering information	
ZS2000-2620	Socket field assembly, Sensor, IP 65/67, M12, straight, female, 4-pin, A-coded, 0.251.5 mm², Ø 48 mm

Accessories	
ZB8801-0000	torque wrench for hexagonal plugs, adjustable
ZB8801-0003	torque cable key, M12F/wrench size 18, for ZB8801-0000

Beckhoff®, TwinCAT®, EtherCAT®, EtherCAT®, EtherCAT G®, EtherCAT G10®, EtherCAT P®, Safety over EtherCAT®, TwinSAFE®, XFC®, XTS® and XPlanar® are registered trademarks of and licensed by Beckhoff Automation GmbH. Other designations used in this publication may be trademarks whose use by third parties for their own purposes could violate the rights of the owners.

© Beckhoff Automation GmbH & Co. KG 02/2021

The information provided in this brochure contains merely general descriptions or characteristics of performance which in case of actual application do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressively agreed in the terms of contract.